


77 SERIES HEAVY DUTY DRIVE HEAD

6,500 ft-lb (8,812 N-m) to 12,000 ft-lb (16,270 N-m) Maximum Typical Applications: Utility and Construction Industries (913) 782-1238 (Tel) (913) 782-4206 (Fax) <u>Sales@Eskridgeinc.com</u> www.Eskridgeinc.com FORM: PSS77-AA

STANDARD BAIL ASSEMBLY



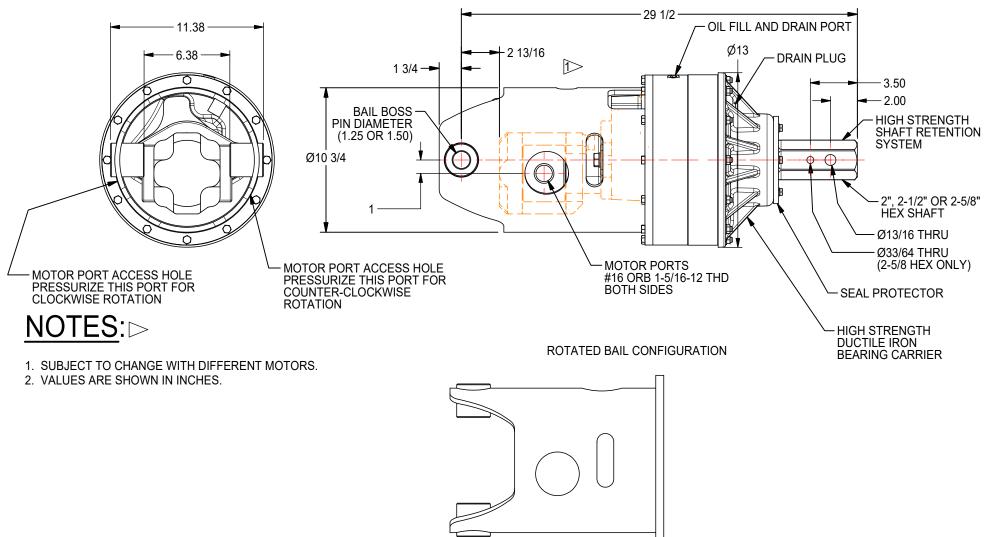

77 SERIES HEAVY DUTY DRIVE HEAD

6,500 ft-lb (8,812 N-m) to 12,000 ft-lb (16,270 N-m) Maximum Typical Applications: Utility and Construction Industries (913) 782-1238 (Tel) (913) 782-4206 (Fax) <u>Sales@Eskridgeinc.com</u> www.Eskridgeinc.com FORM: PSS77-AA

Page 2 of 3

Performance Ratings

Maximum Intermittent Output Torque: Shaft Pressure Load: Shaft Pullout Load: *Shaft Side loading Not Recommended Maximum Input Speed: Maximum Operating Ambient Temperature: Minimum Operating Ambient Temperature:

12,000 ft-lb (16,270 N-m) 19,000 lb (8,600 Kg) 21,000 lb (9,500 Kg)

3000 RPM 110°F (43°C) -20°F (-28°C)

Consult your Eskridge representative to determine ratings for your specific application or configuration

Oil Capacities

77BA	77BC	77BD
6.5 PINTS	6.5 PINTS	6.5 PINTS
3.1 LITERS	3.1 LITERS	3.1 LITERS

ALL UNITS WITH MOTORS SHIPPED WITH OIL Use EP or API GL-5 Designated Lubricants

Ordering Information Example Part Number: 77BA-64F59R

Motor Mount Dimensions


PILOT DIMENSIONS	BOLT CIRCLE
SAE 'C' Ø5.001/5.004	2X 5/8-11 UNC-2B ⊽1 ON Ø7.125 B.C.

Motor Specifications:

Single Speed Hydraulic Gear Motors Maximum System Pressure: 2500 psi (172 bar) Motors are Internally Drained and Generally Don't Require a Case Drain. A 23 Motor is Limited to 100 psi Back Pressure and a 59 is Limited to 500 psi. If the Back Pressure Exceeds these Ratings a Case Drain is Required.

Approximate Unit Weight

With Motor: 250 lb (113 kg)

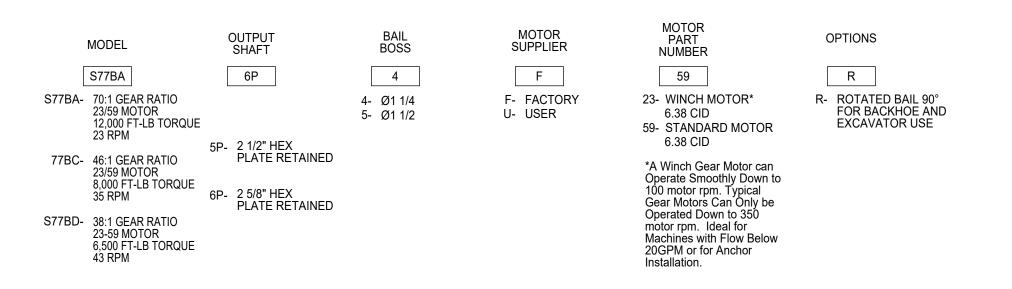




77 SERIES HEAVY DUTY DRIVE HEAD


6,500 ft-lb (8,812 N-m) to 12,000 ft-lb (16,270 N-m) Maximum Typical Applications: Utility and Construction Industries (913) 782-1238 (Tel) (913) 782-4206 (Fax) <u>Sales@Eskridgeinc.com</u> <u>www.Eskridgeinc.com</u> FORM: PSS77-AA

Page 3 of 3

Torque and Speed Charts:

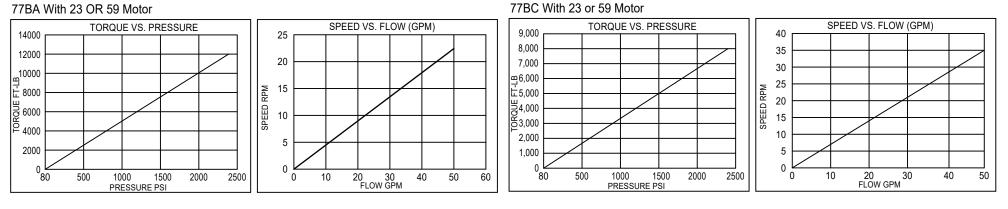

77BD With 23 or 59 Motor

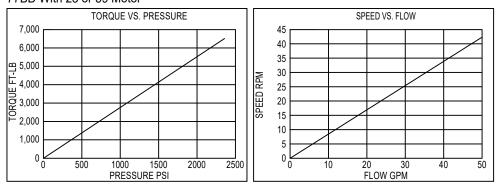

* Starting torques are approximately 25% less than running torque.

- * Torque and speed charts are based on analytical calculations that use average gearbox and motor efficiencies.
- * System back pressure will reduce running torque proportionally.
- * Consult Eskridge Representative for Torque and Speed Charts for your specific application.

ESKRIDGE, INC. EXPRESSLY DISCLAIMS ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE FOR THE PRODUCTS SHOWN HEREIN.

Any claims based on or related to the products shown herein will be satisfied only by repair or replacement in Eskridge, Inc.'s sole discretion to the extent covered by Eskridge's Product Warranty. Eskridge, Inc. is not liable for incidental or consequential damage of any kind or nature that relate in any way to the products shown herein. For complete warranty information, please refer to Eskridge, Inc.'s Product Warranty that applies to the products shown herein and is incorporated by this reference as if fully set forth. A copy of Eskridge, Inc.'s Product Warranty can be obtained by writing Eskridge, Inc. at P.O. Box 875, 1900 Kansas City Road, Olathe, Kansas 66061